

RCA-6LC8, 8LC8**HIGH-MU TRIODE—
SHARP-CUTOFF PENTODES****9-Pin Miniature Types**

Triode Mu = 70

For Sync-Separator and Noise-Immune
Gated-AGC-Amplifier Applications in Color
and Black-and-White TV Receivers

RCA Dark Heater

RCA-6LC8 and 8LC8 are multiunit tubes of the 9-pin miniature type containing a high-mu triode and a sharp-cutoff pentode in the same envelope. These types are useful in both color and black-and-white television receivers.

The triode unit is useful in sync-separator circuits. The pentode unit is useful in noise-immune gated-agc-amplifier circuits. In such circuits, the pentode unit can provide high inverted-noise output at grid No. 2 for use in the cancellation of positive-going noise pulses at the signal grid of the triode unit.


The 6LC8 and 8LC8 are like the 6KA8 and 8KA8, but differ in that they have a separate cathode for each unit and internal connections between pentode grid No. 3, the triode cathode, and the internal shield.

The 6LC8 has a 6.3-volt/0.600-ampere heater having a controlled 11-second warm-up time. The 8LC8 is identical to the 6LC8 except that the 8LC8 has a 0.450-ampere/8.4-volt heater.

The RCA Dark Heater is utilized in both of these types for long life and dependable performance.

GENERAL DATA**Electrical:****Heater Characteristics and Ratings:**


	<i>6LC8</i>	<i>8LC8</i>
Voltage (AC or DC).	6.3 ^a	6.3±0.6
Current. .	0.600 ± 0.040	0.600 ^b
Warm-up time (Av.).	11	-
Peak heater-cathode voltage (Each unit):		
Heater negative with respect to cathode	200	max. volts
Heater positive with respect to cathode	200 ^d	max. volts
Direct Interelectrode Capacitances: ^e		
<i>Triode Unit:</i>		
Grid to plate.	2.2	pf
Grid to cathode & pentode grid No. 3 & internal shield, and heater	2.8	pf
Plate to cathode & pentode grid No. 3 & internal shield, and heater	2.2	pf
<i>Pentode Unit:</i>		
Grid No. 1 to plate	0.10	max. pf
Grid No. 1 to cathode, triode cathode & grid No. 3 & internal shield, grid No. 2, and heater	10	pf
Grid No. 3 & triode cathode & internal shield to plate.	3.4	pf
Grid No. 1 to grid No. 3 & triode cathode & internal shield	0.36	pf
Grid No. 3 & triode cathode & internal shield to plate, cathode, grid No. 2, grid No. 1, and heater.	12.5	pf

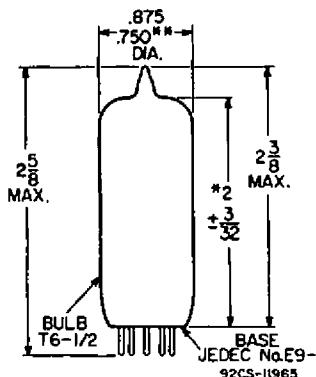

*Measured from base seal to bulb-top line as determined by ring gauge of 7/16 inside diameter.

**Applies in zone starting 0.375 from base seal.

All Dimensions in Inches

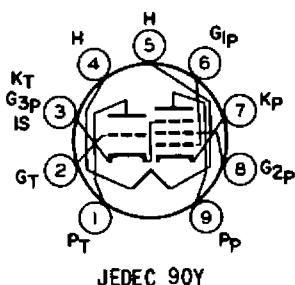

- Pin 1—Triode Plate
- Pin 2—Triode Grid
- Pin 3—Triode Cathode, Pentode Grid No. 3, Internal Shield
- Pin 4—Heater
- Pin 5—Heater
- Pin 6—Pentode Grid No. 1
- Pin 7—Pentode Cathode
- Pin 8—Pentode Grid No. 2
- Pin 9—Pentode Plate



RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N.J.

Trademark(s) ® Registered
Marca(s) Registrada(s)

6LC8, 8LC8 6-63
Printed in U.S.A.

Characteristics, Class A₁ Amplifier:

	<i>Triode Unit</i>	<i>Pentode Unit</i>	
Plate Supply Voltage	200	150	volts
Grid No. 3	-	Connected to negative end of cathode resistor	
Grid-No. 2 Supply Voltage . . .	-	100	volts
Grid-No. 1 Voltage.	-2	-	volts
Grid No. 1	-	Connected to negative end of cathode resistor	
Cathode Resistor	-	180	ohms
Amplification Factor	70	-	
Plate Resistance (Approx.) .	17500	100000	ohms
Transconductance, Grid No. 1 to Plate	4000	4400	μ hos
Transconductance, Grid No. 3 to Plate ^f	-	600	μ hos
Plate Current.	4	4	ma
Grid-No. 2 Current.	-	2.8	ma
Grid-No. 1 Supply Voltage (Approx.) for plate μ a =			
10	-5	-	volts
20	-	-4	volts
Grid-No. 3 Supply Voltage (Approx.) for plate μ a = 20 ^f	-	-7	volts
Mechanical:			
Operating Position			Any
Maximum Overall Length			2-5/8"
Maximum Seated Length.			2-3/8"
Length, Base Seat to Bulb Top (Excluding tip).			2" \pm 3/32"
Diameter			0.750" to 0.875"
Dimensional Outline.			JEDEC No. 6-3
Bulb			T6-1/2
Base			Small-Button Naval 9-Pin (JEDEC No. E9-1)

GATED AGC AMPLIFIER & NOISE INVERTER*Pentode Unit*For operation in a 525-line, 30-frame system^g**Maximum Ratings, Design-Maximum Values:**

DC Plate Voltage	300	max.	volts
Peak Positive-Pulse Plate Voltage ^h .	600	max.	volts
Grid-No. 3 (Control-Grid) Voltage:			
Negative-bias value.	100	max.	volts
Positive-bias value.	0	max.	volts

^a At heater amperes = 0.600.^b At heater volts = 6.3.^c At heater amperes = 0.450.^d The dc component must not exceed 100 volts.^e Without external shield.^f With no external connection to triode plate and triode grid.^g As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.^h This rating is applicable when the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.**Grid-No. 2 (Screen-Grid)**

Supply Voltage 300 max. volts

Grid-No. 2 Voltage. . . See GRID-No. 2-INPUT RATING CHART

Grid-No. 1 (Control-Grid) Voltage:

Negative-bias value. 50 max. volts

Positive-bias value. 0 max. volts

Grid-No. 2 Input:

For grid-No. 2 voltages up to 150 volts. 1.1 max. watts

For grid-No. 2 voltages between 150 and 300 volts. See GRID-No. 2-INPUT RATING CHART

Plate Dissipation. 2 max. watts

Maximum Circuit Values:**Grid-No. 1-Circuit Resistance:**

For fixed-bias operation 0.5 max. megohm

For cathode-bias operation 1 max. megohm

AMPLIFIER—Class A₁*Triode Unit***Maximum Ratings, Design-Maximum Values:**

Plate Voltage. 300 max. volts

Grid Voltage:

Negative-bias value. 50 max. volts

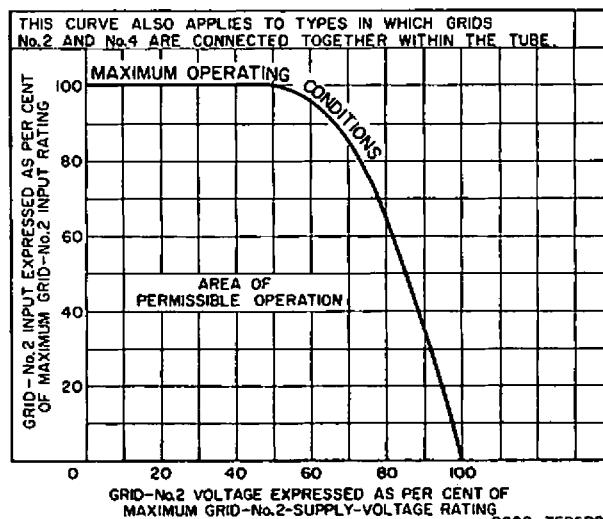
Positive-bias value. 0 max. volts

Plate Dissipation. 1.1 max. watts

Maximum Circuit Values:**Grid-Circuit Resistance:**

For fixed-bias operation 0.25 max. megohm


For cathode-bias operation 1 max. megohm

GRID-No. 2-INPUT RATING CHART

92CS-7586R2


Information furnished by RCA is believed to be accurate and reliable. However, no responsibility is assumed by RCA for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of RCA.

AVERAGE PLATE CHARACTERISTICS
Triode Unit

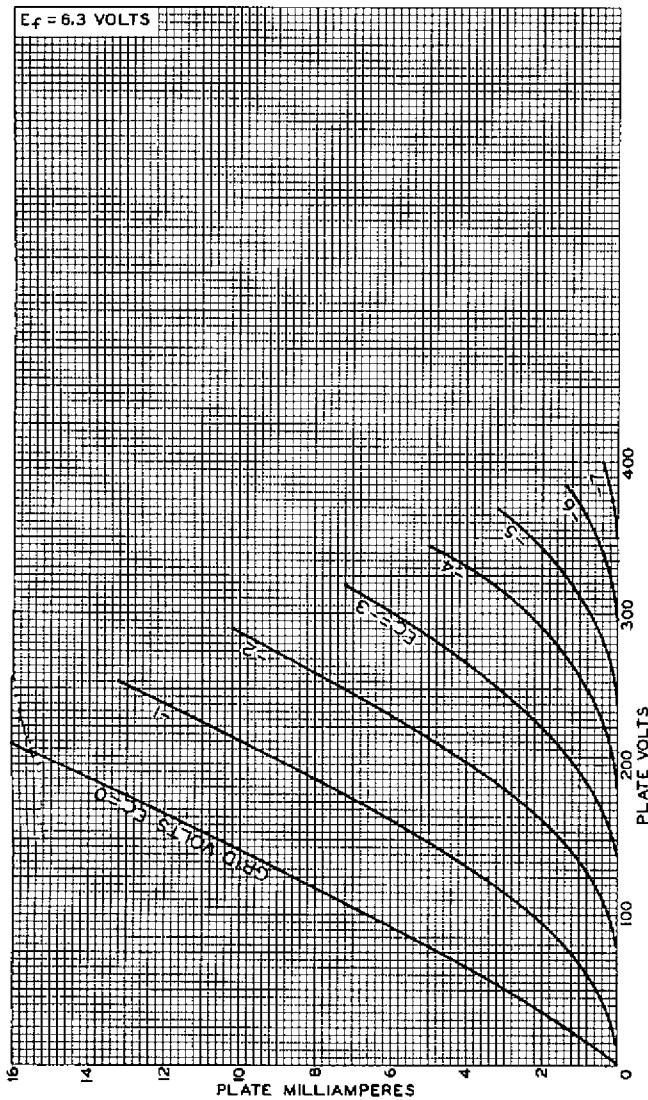

92CM-8644



AVERAGE CHARACTERISTICS
Triode Unit

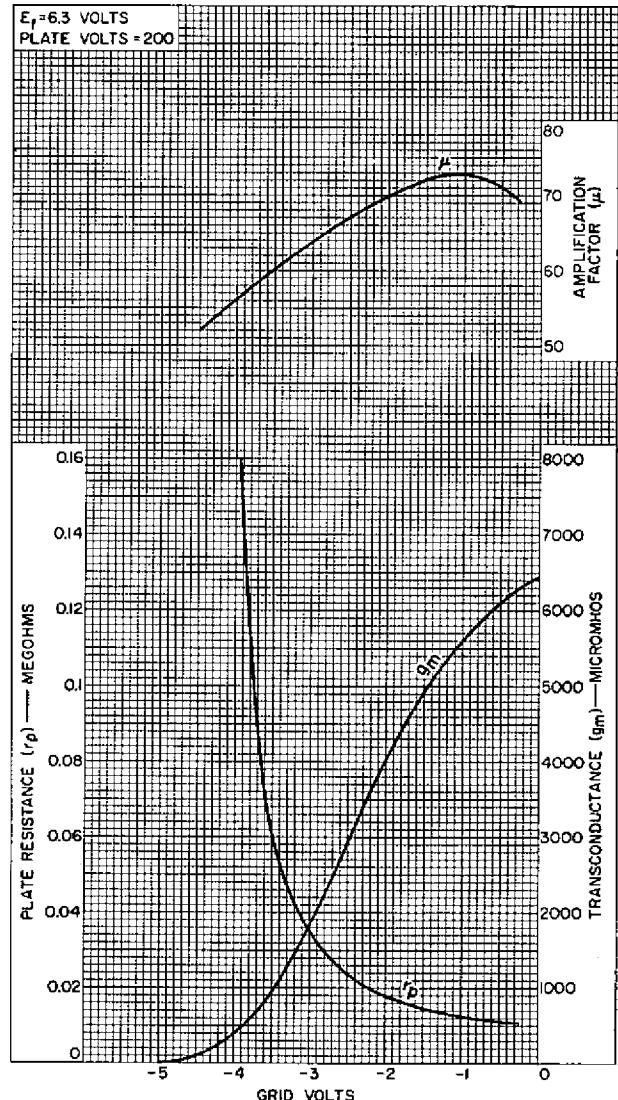

92CM-8647

For Type 6LC8, and for Type 8LC8 ($E_f = 8.4$ V).

AVERAGE CHARACTERISTICS
Pentode Unit

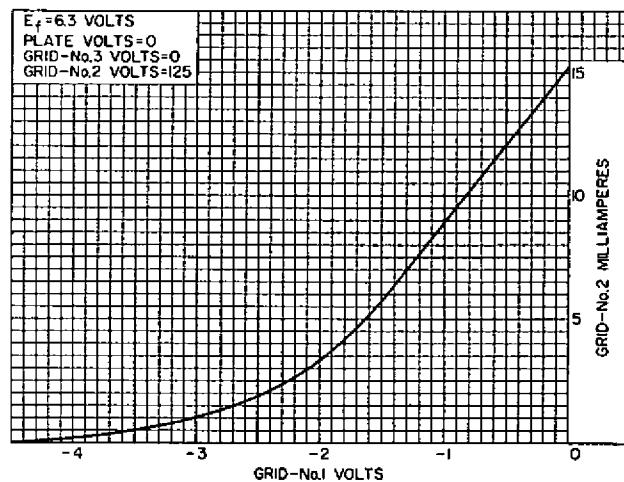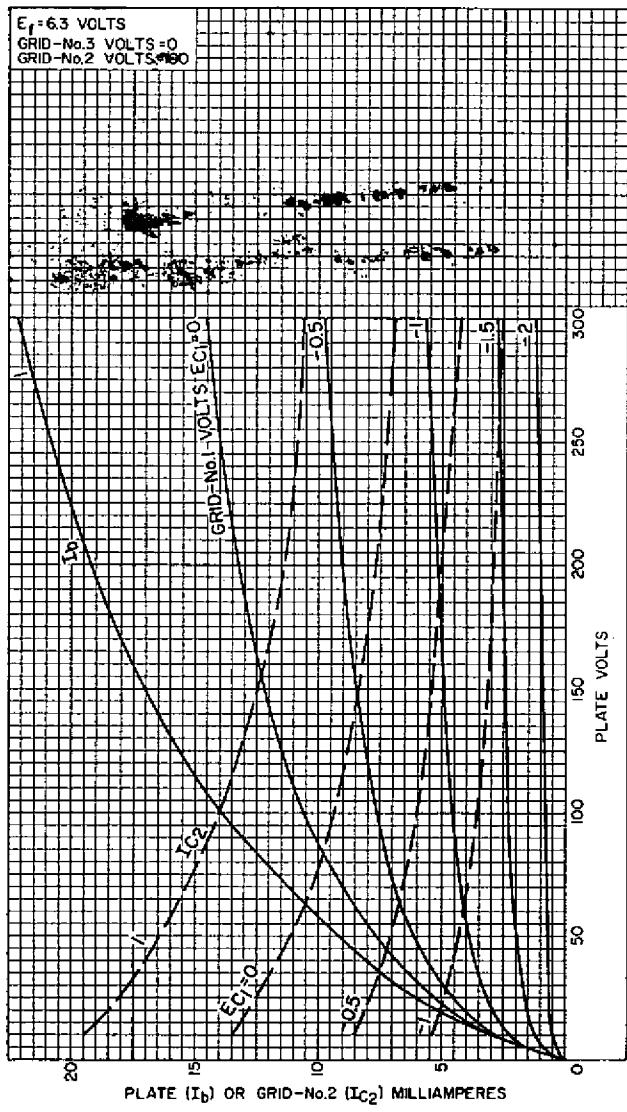

For Type 6LC8, and for Type 8LC8 ($E_f = 8.4$ V).